MOTOROLA

ENMN4019

Accessories

EN Visor-Mounted Microphone

DE Freisprechmikrofon zur Sonnenblendenmontage

FR Microphone de pare-soleil

ES Micrófono montado en el parasol

RU Микрофон, закрепляемый на козырьке

Professional Radio

English

DESCRIPTION

The ENMN4019 Visor-Mounted Microphone facilitates hands free microphone use with the Mobile Professional Radio. Hardware to install the microphone is required (order kit HLN9457). When the Visor-Mounted microphone is installed and connected to the mobile radio, the radio's microphone is disabled via CPS programming.

Three Push To Talk (PTT) devices are available for use with the ENMN4019 Visor-Mounted Microphone:

- footswitch RLN4856
- pushbutton RLN4857
- gooseneck RLN4858

The PTT devices are available separately and include installation instructions.

English

Connecting to the Mobile Radio

The visor-mounted microphone cable connects to a 16-pin connector block (part of kit HLN9457): white wire connects to pin 2, ground wire connects to pin 7 (Figure 1). The connector block plugs into the centre of the 20-pin accessory connector (four outside pins do not connect) on the back of the mobile radio.

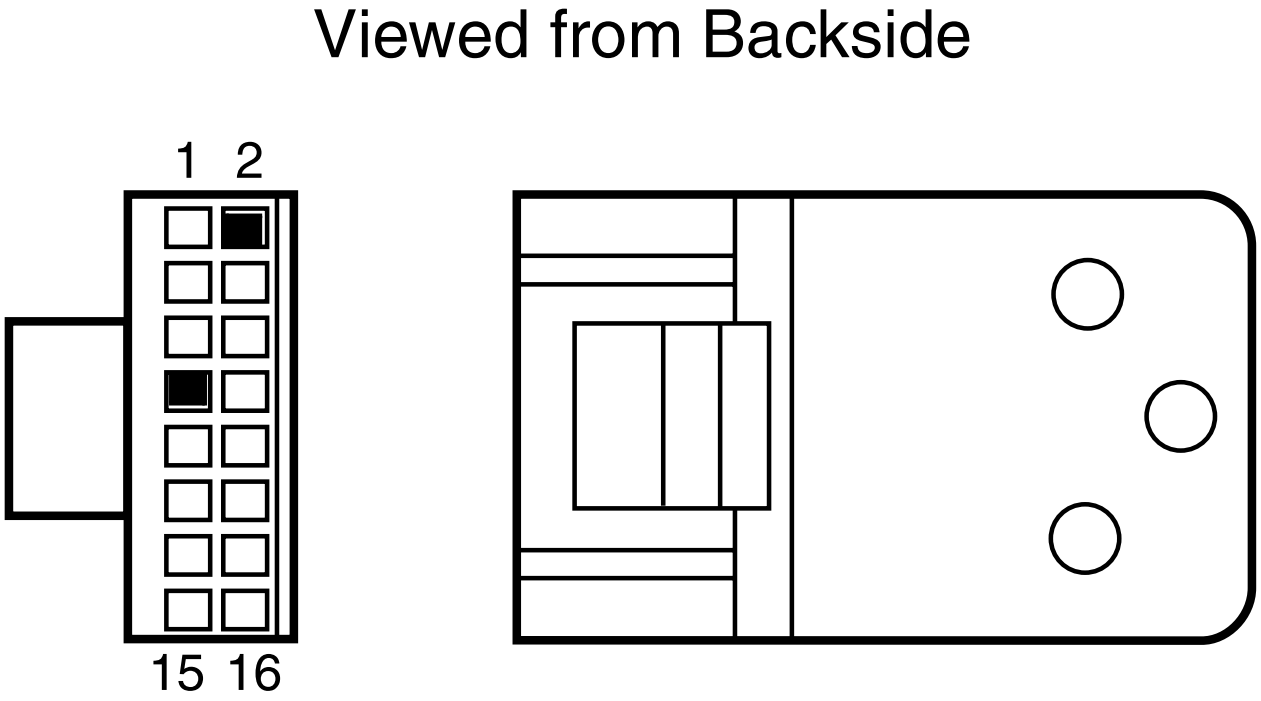

Figure 1. 16-Pin Connector Block

SERVICE

The ENMN4019 Visor-Mounted Microphone is not repairable. Order a replacement microphone as necessary.

English

© 2000 by Motorola, Inc.

Motorola, and Professional Radio
are trademarks of Motorola, Inc.
All Rights Reserved

68P64121B11